



Power of Desire



SOMANY

Somany Ceramics Limited : Noida: F-36, Sector-6; Ph.: 0120-4627900.

Ahmedabad: Office no. 7-14, 4th Floor, Aggarwal Mall, Opp. Sola Bhagwat Vidyapeeth, S.G. Road, Sola, Ph.: 079-66042500 to 599

Registered office: 2, Red Cross Place, Kolkata - 700001; Ph. (033) 22487406/5913

www.somanyceramics.com | e-mail marketing@somanyceramics.com

Toll Free No. 1800-103-0004 (Timing-10:00am to 6:30pm; Mon-Fri)



Visit us at:
www.somanyceramics.com



Find us at:
www.facebook.com/SomanyCeramic



Find us at:
www.twitter.com/SomanyCeramic



Find us at:
www.instagram.com/SomanyCeramics



DURAGRES / CAT / DECEMBER 2021

DURAGRES
Timeless Elegance

SOMANY
Tiles | Bathware

ZAMEEN SE JUDEY


**NEW
ARRIVAL** **800X
1600mm**
GLAZED VITRIFIED TILES

UNIT 4 - FOR SOUTH



**800X
1600mm**
GLAZED VITRIFIED TILES

ENORME MOZART BEIGE FP

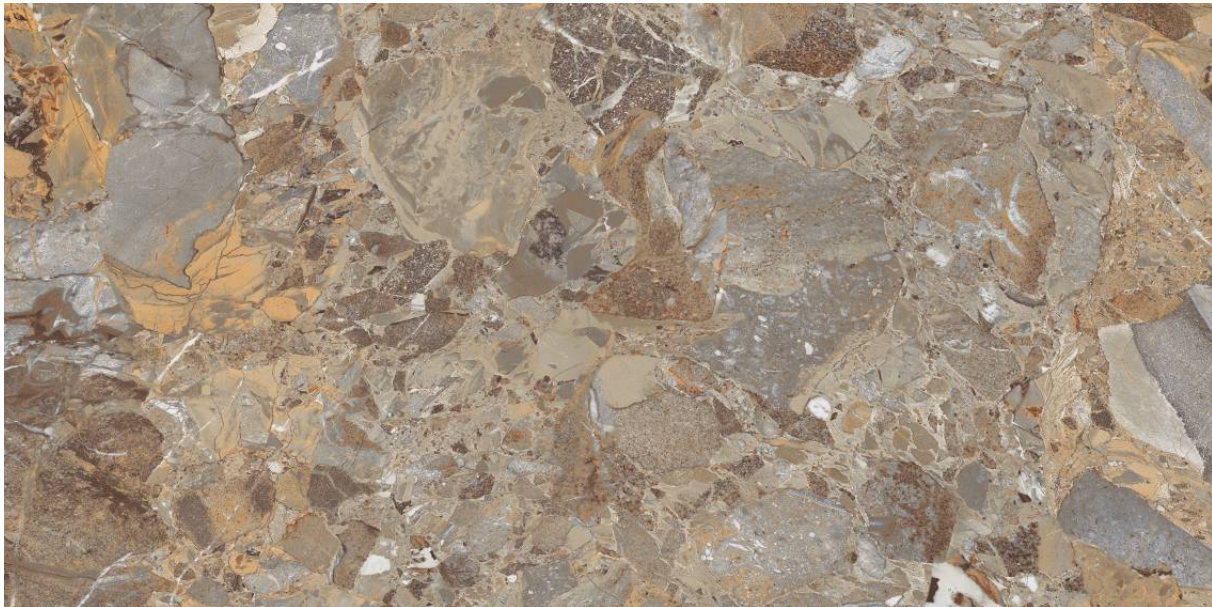

ENORME LUCIDO SANTA MARIYA

High Gloss, 800x1600mm

V2

↕

🌀

🔧



ENORME PERLATINO BEIGE FP

Full Polish, 800x1600mm

V3

↕

🌀

🔧



ENORME MOZART BEIGE FP

Full Polish, 800x1600mm

V4

↕

🌀

🔧



ENORME MOZART GREY FP

Full Polish, 800x1600mm

V4

↕

🌀

🔧



ENORME AMAZONIA BIANCO FP

Full Polish, 800x1600mm

V3

+

+

+

+



ENORME AMAZONIA BEIGE FP

Full Polish, 800x1600mm

V3

+

+

+

+



ENORME AMAZONIA COFFEE FP

Full Polish, 800x1600mm


V3

+

+

+

+

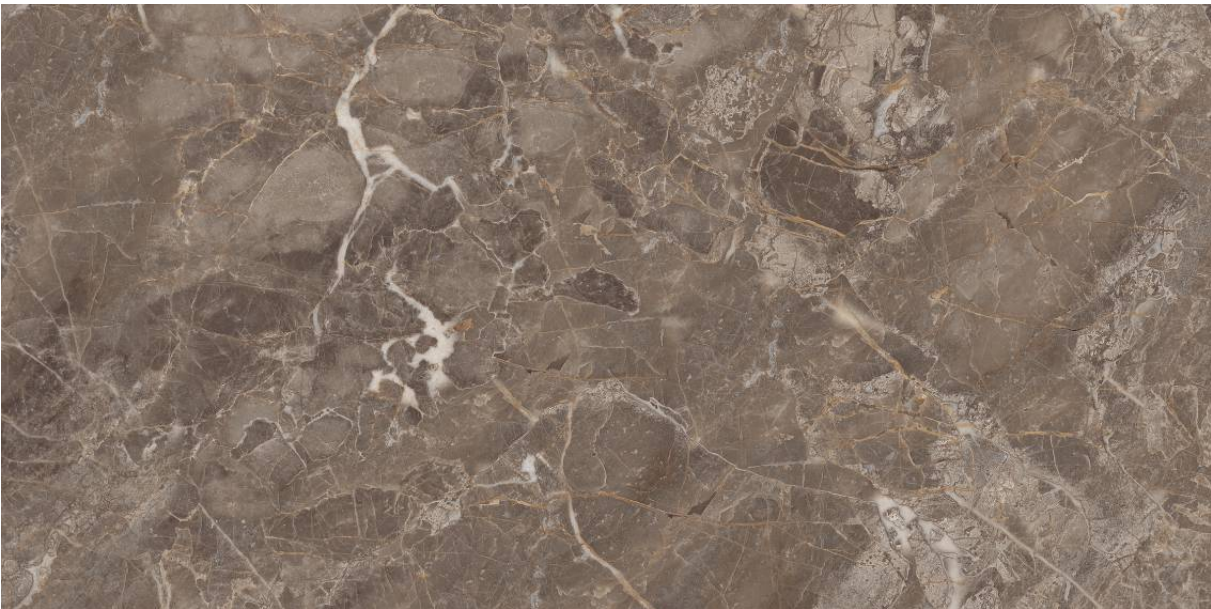

ENORME AMAZONIA GREY FP

Full Polish, 800x1600mm

V3

+

+

+

+



ENORME NUVOLATO BEIGE FP

Full Polish, 800x1600mm


V3

+

+

+

+

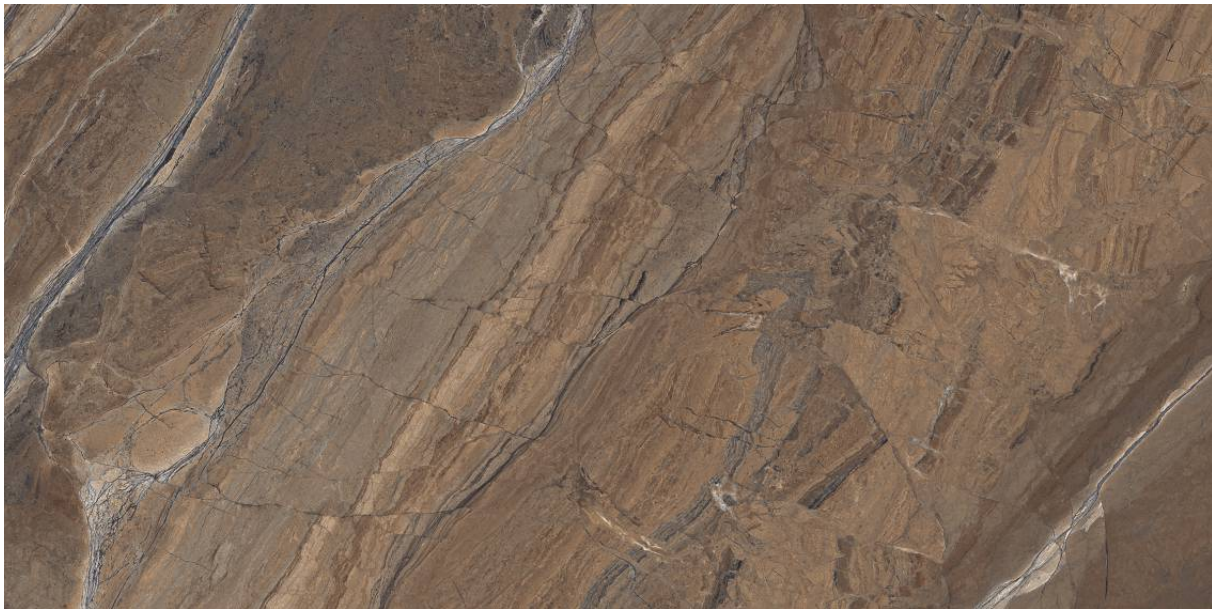

ENORME NUVOLATO BROWN FP

Full Polish, 800x1600mm

V3

+

+

+

+



ENORME NUVOLATO GREY LIGHT FP

Full Polish, 800x1600mm

V3

+

+

+

+



ENORME NUVOLATO GREY DARK FP

Full Polish, 800x1600mm

V3


+

+

+

+

800X1600MM | FULLPOLISH

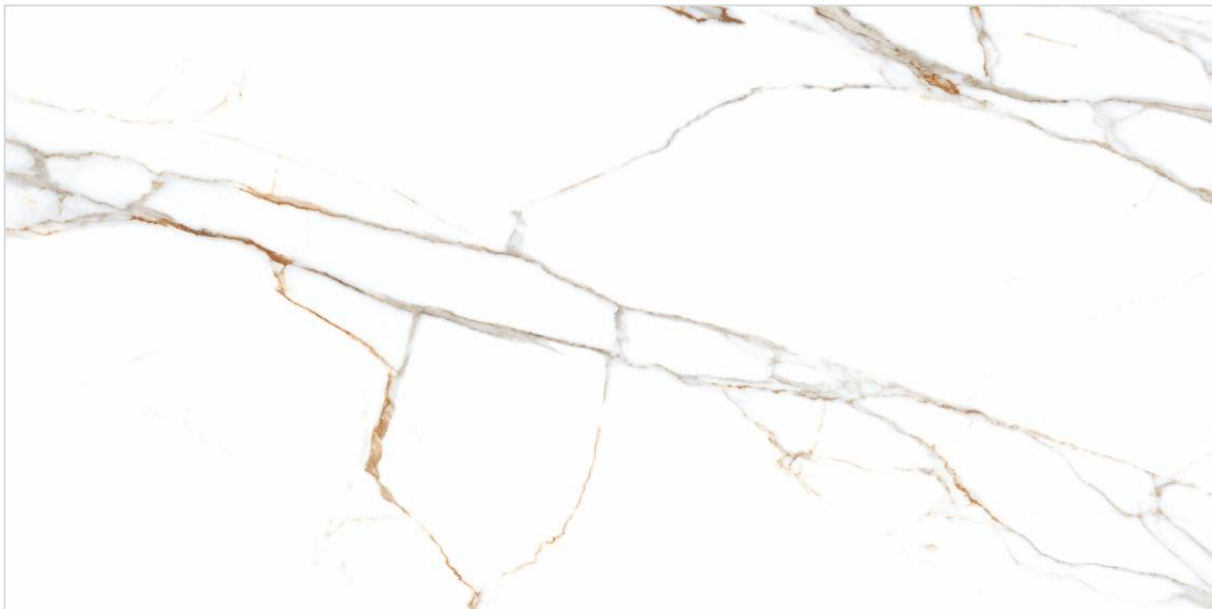

ENORME IMPERIAL STATURIO FP
Full Polish, 800x1600mm

V4   





ENORME STONE BEIGE

Matt, 800x1600mm

V4

☞

🌀

🚫



ENORME STONE BROWN

Matt, 800x1600mm

V4

☞

🌀

🚫



ENORME STONE NATURAL

Matt, 800x1600mm

V4

☞

🌀

🚫



ENORME STONE EARTH

Matt, 800x1600mm

V4

☞


🌀

🚫



800X
1600mm
GLAZED VITRIFIED TILES


ENORME STONE BROWN

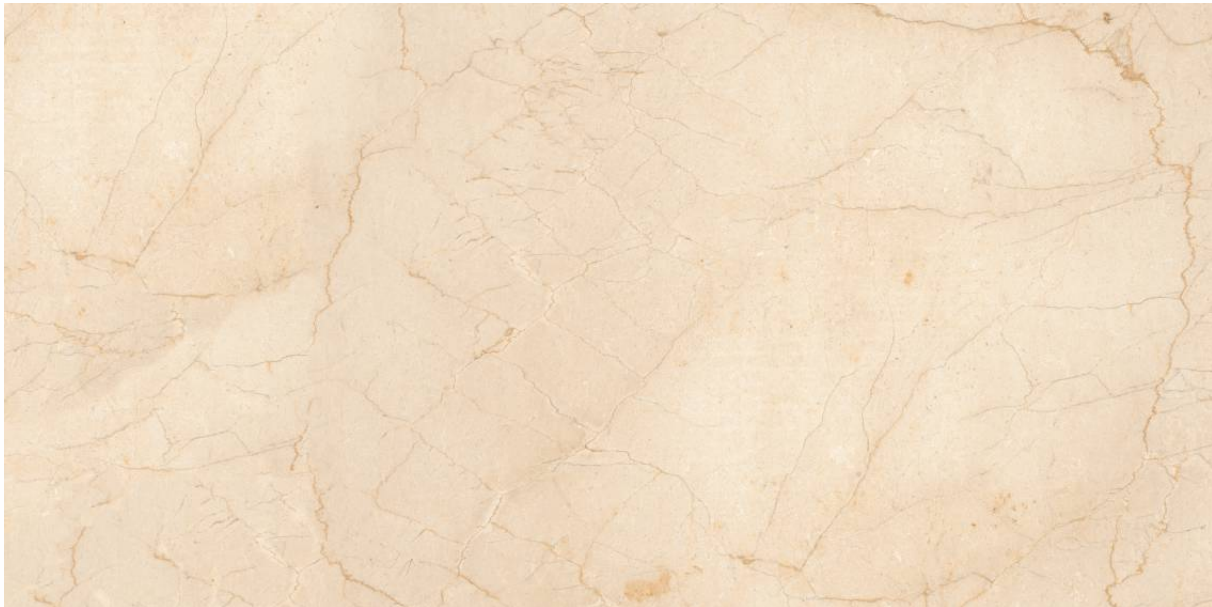

IMPRESSION CREMA MARFILE

Carving, 800x1600mm

V2

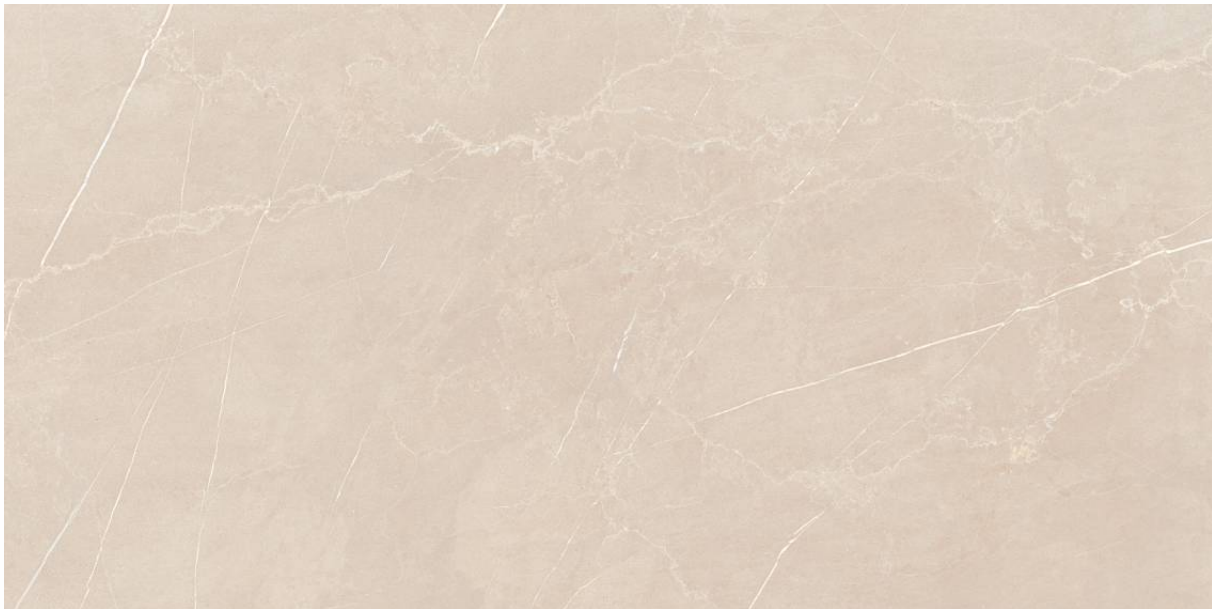

IMPRESSION VALENTINO BEIGE

Carving, 800x1600mm

V4



IMPRESSION VALENTINO GREY

Carving, 800x1600mm

V4



IMPRESSION VALENTINO COFFEE


Carving, 800x1600mm

V4

DESIGN, PATTERN & SHADE VARIATION GUIDE

Current development efforts have made ceramic tiles to resemble and look authentically identical to natural material (Stone, Wood, Fabric), and it has become increasingly difficult in many cases, to distinguish between two.

Recognising this situation, it is necessary to be informed on the grade of design & pattern variation that is expected from these products. As a general reference, the design & Pattern guide below classifies a scale of ranges according to the degree of variation.

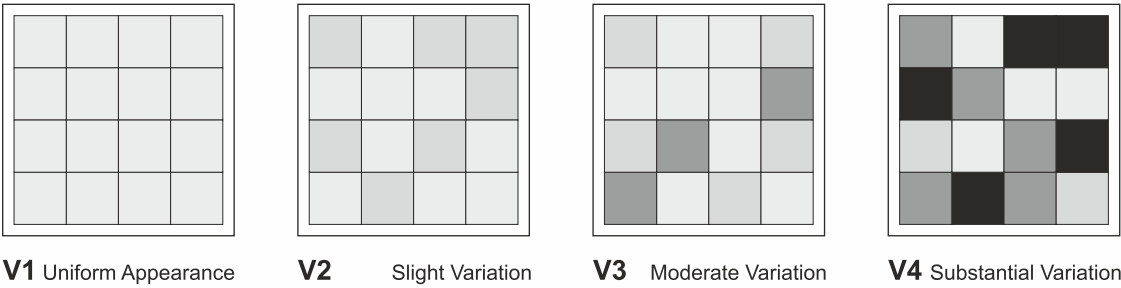

The classification is as follow:

V1 Minimal Variation **V3** Random Variation **V2** Slight Variation **V4** Substantial Variation



High Definition Image

While laying the tiles please follow the arrow on the back of the tiles.

For removing the wax from the surface of the tiles please use the soft cotton cloth for rubbing with any boric/talk powder

Notes

The reproduction of tiles in this catalogue is restricted to four color printing only and tiles are not in relative sizes, therefore customers are advised to see the physical sample before placing the order. “ Technical Specification” for Somany wall & floor tiles are applicable only for premium quality tiles. Please inspect all tiles prior to installation. Company will not entertain complaints once tiles are laid/fixed. Complaints will not be entertained for Borders, Highlighters & Motifs.

PACKING DETAIL FOR 800x1600MM GVT TILES				
Nominal Size	Thickness(mm)	Average weight per carton (Kgs)	No. of tiles per carton	Coverage area per carton
800x1600mm	9.0	52.00	2	2.56sq.mtr. / 27.555sq.ft.

TECHNICAL SPECIFICATION FOR 800x1600MM GVT TILES				
Characteristics	Requirement as per IS 15622 :2017 0.08 < E ≤ 3% Group B1b	Requirement as per ISO 13006 ≤ 0.5% Group B1a	Our Values	Test Method
A) Dimension & Surface Quality				
I) Length & Width	± 0.10%	± 0.3%	± 0.10%	IS 13630 Part 1/ ISO 10545-2
ii) Thickness	± 5.0%	± 5.0%	± 4.0%	
iii) Straightness of Side	± 0.10%	± 0.3%	± 0.10%	
iv) Rectangularity	± 0.10%	± 0.3%	± 0.10%	
v) Surface Flatness				
a) Center curvature (%) (max.Deviation)	± 0.50%	± 0.4%	± 0.2 %	
b) Edge curvature (%) { max.Deviation)	± 0.50%	± 0.4%	± 0.2 %	
c) Corner warpage (%) (max.Deviation)	± 0.50%	± 0.4%	± 0.2 %	
vi) Surface Quality	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects	
B) Physical Properties				
I) Water Absorption	Av. 0.08<E ≤ 3 %, Individual 3.3 max	Av ≤ 0.5 %, Individual 0.6% max	E ≤ 0.08%	IS 13630 Part 2/ ISO 10545-3
ii) Modulus of Rupture [N/mm2]	Av 30, Individual 27 min	Av 35, Individual 32 min	Avg.35	IS 13630 Part 6/ISO 10545-4
iii) Breaking Strength in N	1100	1300	Min,1300	
iv) Scratch Hardness of surface (Mohs)	Min 5	N/A	Min.5(for Matt & RT), Min.3(for Polished)	IS 13630 Part 13
v) Resistance to Abrasion of glazed tiles(Class I to V)	Min II	Abrasion Class & Cycle passed	Class-V(for Matt & RT), Class-III(for polished)	IS 13630 Part 11 /ISO 10545-7
vi) Coefficient of linear thermal expansion from embiant temperature to 100° C	7 X 10 ⁻⁶ K ⁻¹ max	Test Method Available	Max 6 X 10 ⁻⁶ K ⁻¹ max	IS 13630 Part 4/ ISO 10545-8
vii) Thermal Shock Resistance	10 cycle min	Test Method Available	10 cycle passed	IS 13630 Part 5/ISO-10545-9
viii) Crazing Resistance	4 cycle @ 7.5bar min	Required	4 cycle passed	IS 13630 Part 9/ISO 10545-11
ix) Impact Resistance as Co-efficient of Restitution (COR)	0.55 min	Test Method Available	Min 0.55	IS 13630 Part 14/ISO 10545-5
x) Frost Resistance	Required	Required	100 Cycle Passed	IS 13630 Part 10/ISO 10545-12
C) Chemical Resistance (glazed Tiles)				
I) Stain Resistance	Min Class 1	Min Class 3	Min Class-1 (For Matt), Min Class-2 (for polished)	IS 13630 Part 8 &ISO 10545-14
ii) Resistance to household chemicals	Min Class AA	Min B	Min Class AA	IS 13630 Part 8/ ISO 10545-13
iii) Resistance to acids and alkalis (with exception of hydrofluoric acid and its compounds)	Required if agreed	Declared Value	Min Class AA	