

RESPONSIVE

WOODLINE *Premium*

Luxury Vinyl Tile | 2.0mm | 6" x 36" | 45 SQ.FT. PER BOX



RESPONSIVE 

PLANK SIZE: 6" x 36" x2.0mm

WOODLINE *Premium*

LVT FLOORING

SIZE: 6" X36"

THICKNESS: 2.0 MM

COVERAGE: 45 SF / CARTON

INSTALLATION: DRY BACK, GLUE DOWN

WOODLINE *Premium*
RWL-2001

WOODLINE *Premium*

RESPONSIVE 

RWL-2001

5 UNIQUE

PATTERN

VARIATIONS



WOODLINE *Premium*

RWL-2002

WOODLINE *Premium*

RESPONSIVE 

RWL-2002

5 UNIQUE

PATTERN

VARIATIONS



WOODLINE *Premium*
RWL-2003

RESPONSIVE



WOODLINE *Premium*


RESPONSIVE 

RWL-2003

5 UNIQUE

PATTERN

VARIATIONS

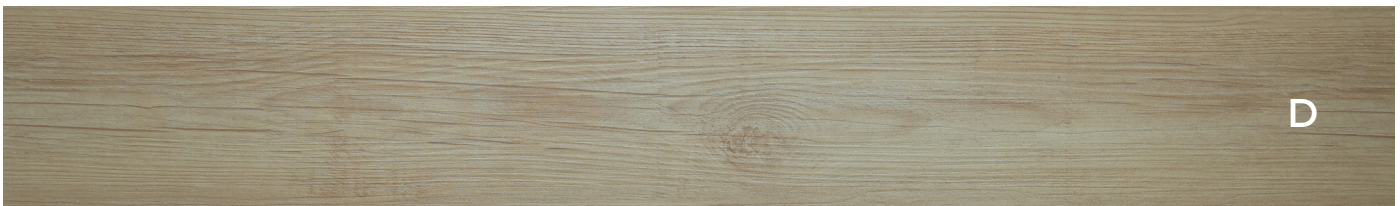

WOODLINE *Premium*

RWL-2004

WOODLINE *Premium*

RESPONSIVE 

RWL-2004

5 UNIQUE

PATTERN

VARIATIONS



WOODLINE *Premium*
RWL-2005

WOODLINE *Premium*

RESPONSIVE 

RWL-2005

5 UNIQUE

PATTERN

VARIATIONS



WOODLINE *Premium*
RWL-2006

WOODLINE *Premium*

RESPONSIVE 

RWL-2006

5 UNIQUE

PATTERN

VARIATIONS



WOODLINE *Premium*
RWL-2007

WOODLINE *Premium*



RESPONSIVE 

RWL-2007

5 UNIQUE

PATTERN

VARIATIONS

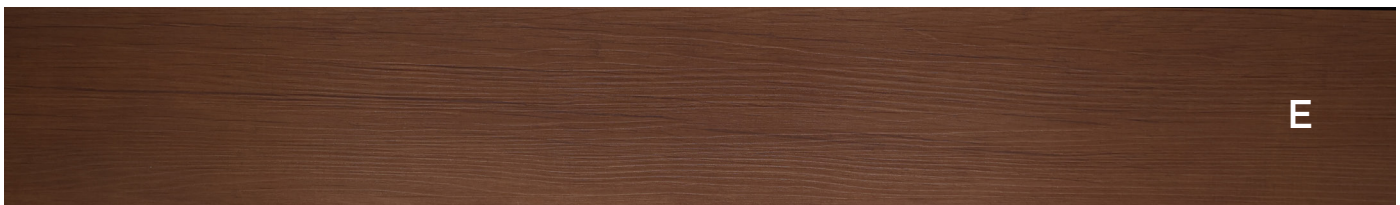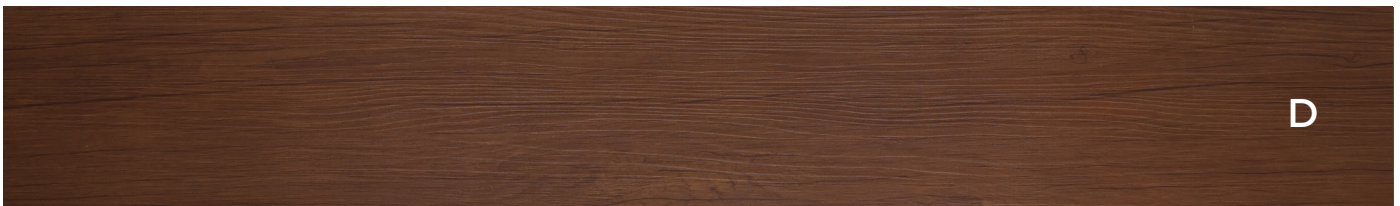

WOODLINE *Premium*

RWL-2008

WOODLINE *Premium*




RESPONSIVE 

RWL-2008

5 UNIQUE

PATTERN

VARIATIONS

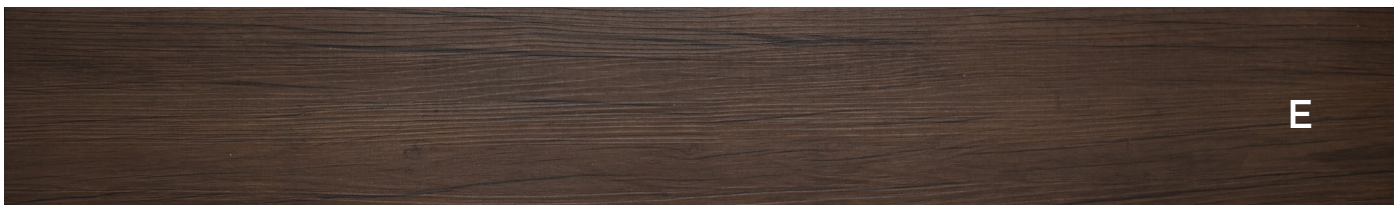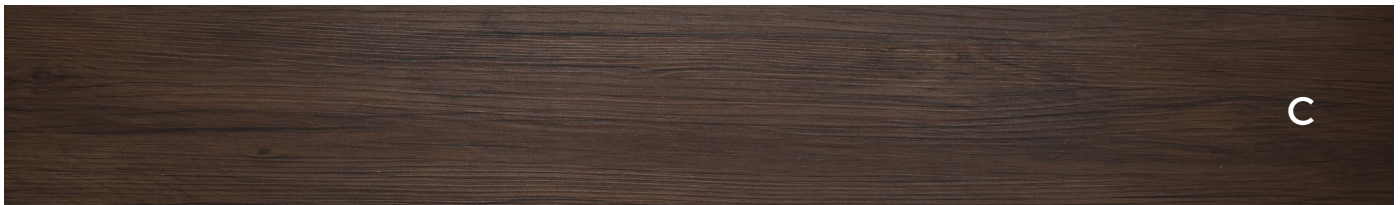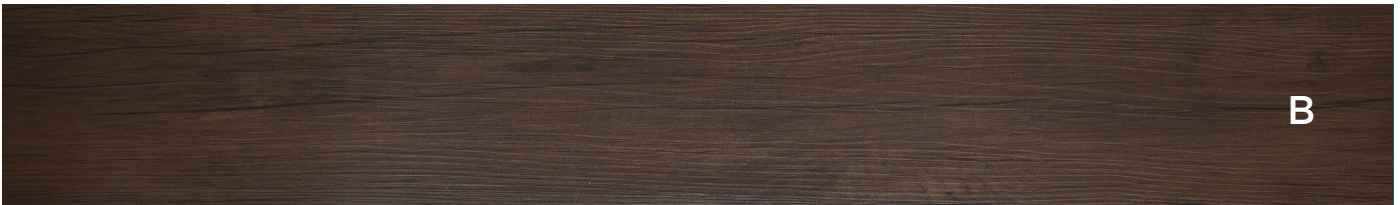

WOODLINE *Premium*
RWL-2009

WOODLINE *Premium*



RESPONSIVE 

RWL-2009

5 UNIQUE

PATTERN

VARIATIONS

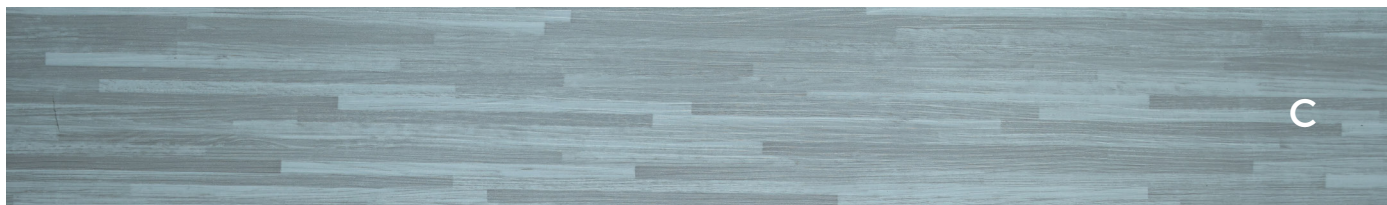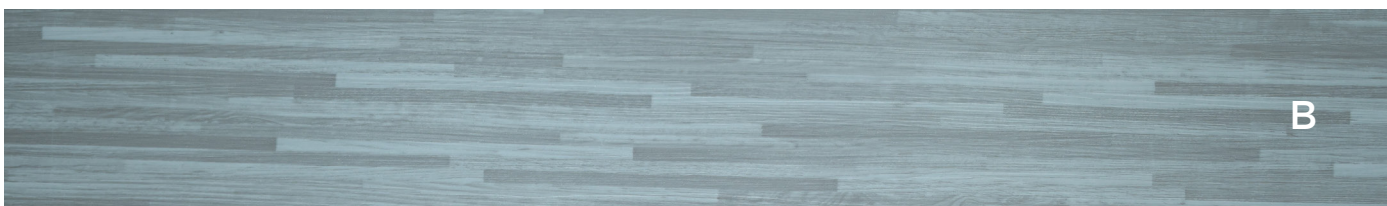

WOODLINE *Premium*
RWL-2010

WOODLINE *Premium*




RESPONSIVE 

RWL-2010

5 UNIQUE

PATTERN

VARIATIONS

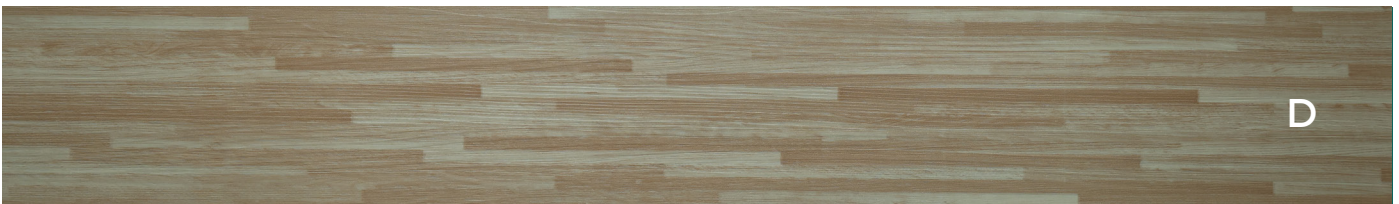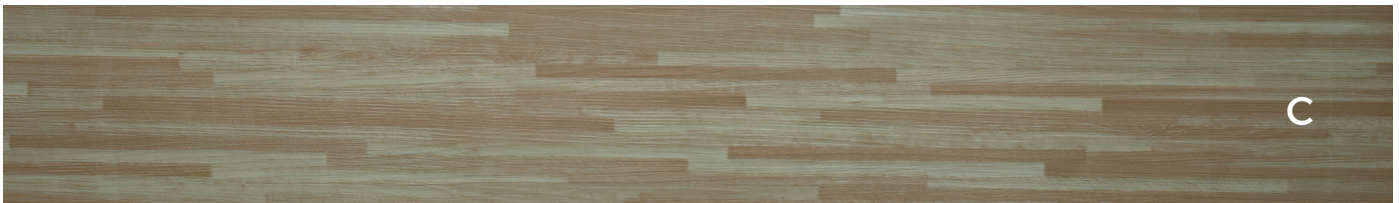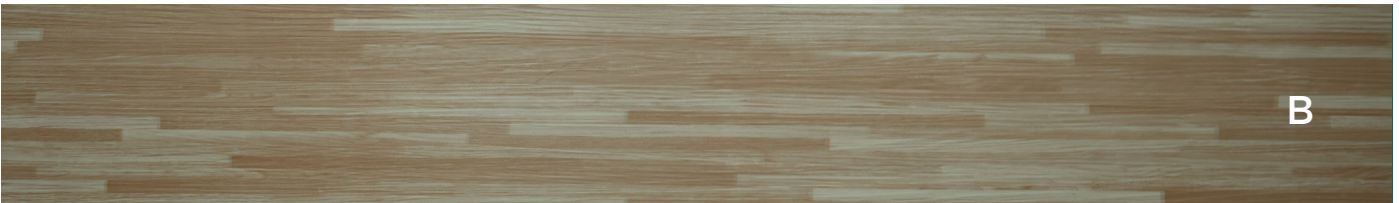

WOODLINE *Premium*
RWL-2011

WOODLINE *Premium*

RESPONSIVE 

RWL-2011

5 UNIQUE

PATTERN

VARIATIONS



WOODLINE *Premium*
RWL-2012

WOODLINE *Premium*




RESPONSIVE 

RWL-2012

5 UNIQUE

PATTERN

VARIATIONS

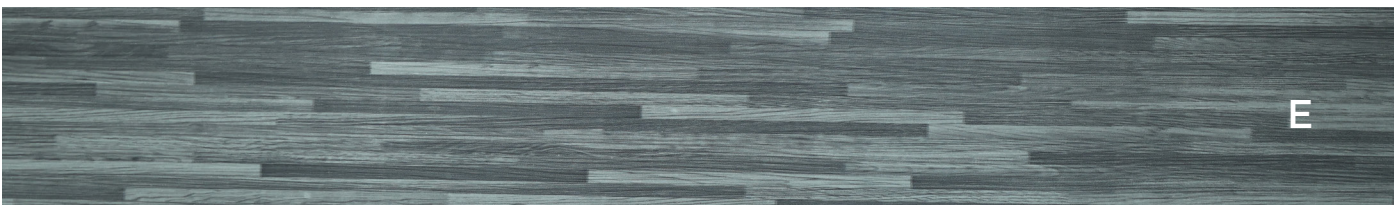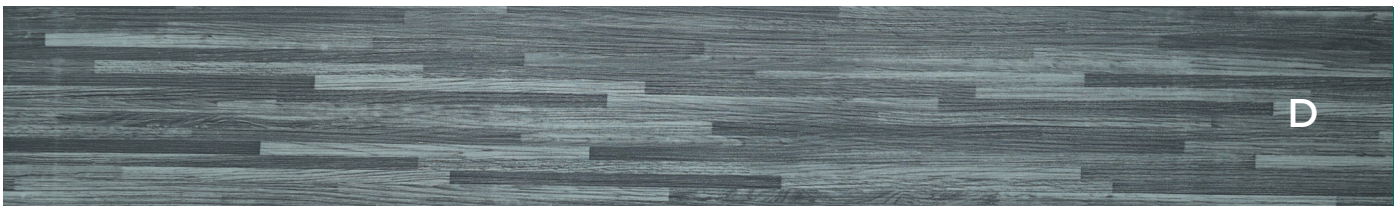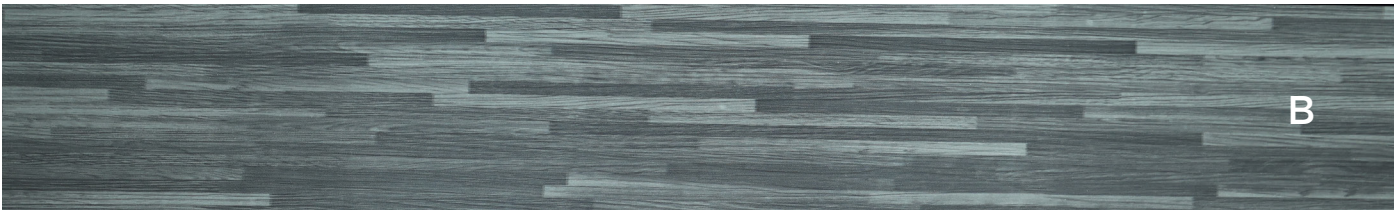

WOODLINE Premium

Luxury Vinyl Planks For Light To Heavy Commercial | PUR Polyurethane Reinforcement | Product Standard: ISO 10582

CERTIFICATION	STANDARD	WOODLINE PREMIUM 2.0
TYPE OF FLOOR COVERING	ISO 10582	LUXURY VINYL TILE
CE CERTIFICATION	EN 14041	Yes
CLASSIFICATION	EN ISO 10874	Commercial : 31

TECHNICAL CHARACTERISTICS	STANDARD	WOODLINE PREMIUM 2.0
TOTAL THICKNESS	EN ISO 2436 (EN 428)	2.0 MM
WEAR LAYER THICKNESS	EN ISO 24340 (EN 429)	0.20 MM
SURFACE TREATMENT	UV TREATED	PUR
WEAR LAYER BINDER CONTENT	ISO 10582	TYPE I
FORM OF DELIVERY	EN ISO 24342 (EN 427) Planks box	6" X 36" 45.00 Sq.ft / Box

TECHNICAL PERFORMANCES	STANDARD	WOODLINE PREMIUM 2.0
DIMENSIONAL STABILITY	EN ISO 23999 (EN 434)	Pass
REACTION TO FIRE	EN 13501 - 1	Bfl- S1 glued over A2fl substrate (concrete)
RESIDUAL INDENTATION	EN ISO 24343-1 (EN 433)	Pass
FURNITURE LEG	EN 424	No Damage
CASTOR CHAIR	EN ISO 4918 (EN 425)	No Damage
CURL RESULTANT TO HEAT	EN ISO 23999 (434)	Pass
THERMAL RESISTANCE	EN ISO 10456	0.07 M2 K/W
LIGHT FASTNESS	EN ISO 105 - B02	>Grade 6 Pass
RESISTANCE TO CHEMICALS	EN ISO 26987 (EN423)	Good Resistance Pass
SLIP RESISTANCE	DIN51130 EN 13893	R9 Class DS
ELECTRICAL PROPERTIES	EN 1815 EN 1081	<2 kV on concrete R1 > 10 ¹⁰ Ω



ISO 9001

ISO 14001

ISO 18001



EN 14041

