

RESPONSIVE
FLOORS
EK ANOKHA EHSAAAS

OPULENCE®





PLANK SIZE: 7" x 48" x 2.0mm

OPULENCE®

LVT FLOORING

SIZE: 7" x 48"

THICKNESS: 2.0 MM

WEAR LAYER: 0.30 MM

PIECES: 20 PER BOX

COVERAGE: 46.65 SF / CARTON

INSTALLATION: DRY BACK, GLUE DOWN



OPULENCE
IMP-OPL-701

IMPACT[®]
A BETTER FLOOR




OPULENCE
IMP-OPL-701

RESPONSIVE 

IMPACT[®]
A BETTER FLOOR

OPULENCE
IMP-OPL-701

5 UNIQUE
PATTERN
VARIATIONS

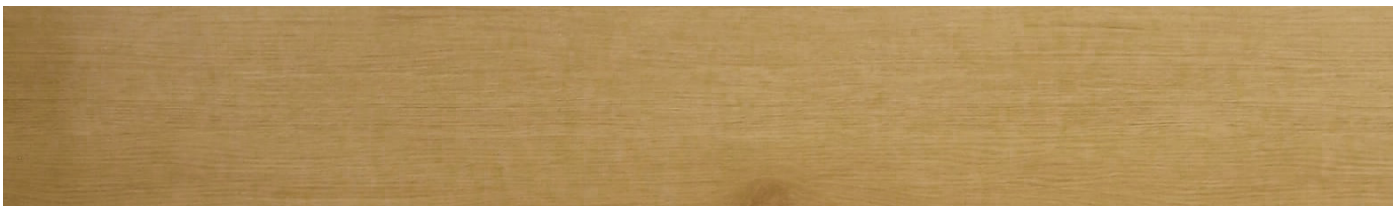



OPULENCE
IMP-OPL-702

IMPACT
A BETTER FLOOR

OPULENCE
IMP-OPL-702

RESPONSIVE 

IMPACT[®]
A BETTER FLOOR

OPULENCE
IMP-OPL-702

5 UNIQUE
PATTERN
VARIATIONS





OPULENCE
IMP-OPL-703

IMPACT[®]
A BETTER FLOOR




OPULENCE
IMP-OPL-703

RESPONSIVE 

IMPACT[®]
A BETTER FLOOR

OPULENCE
IMP-OPL-703

5 UNIQUE
PATTERN
VARIATIONS

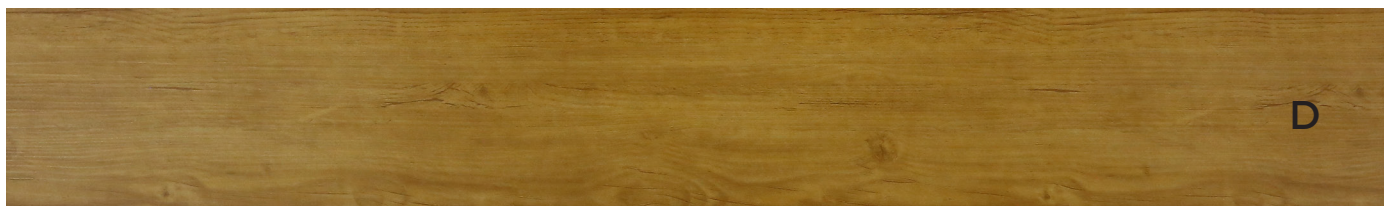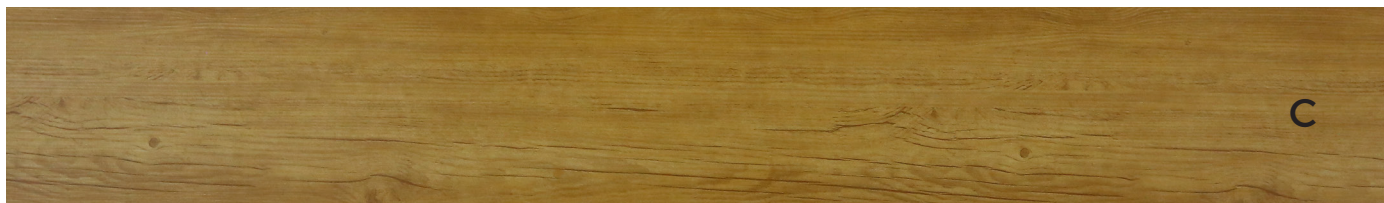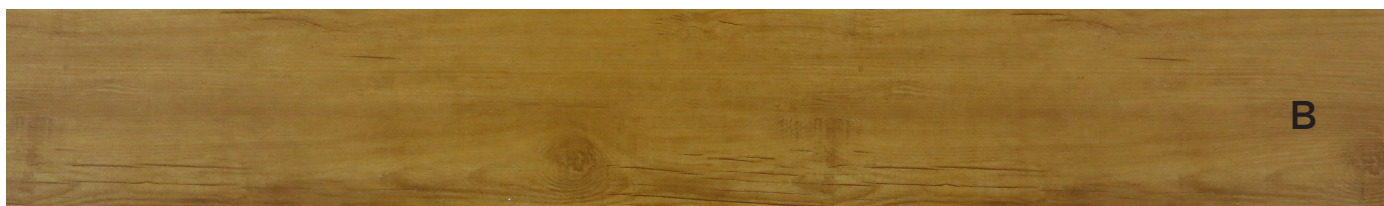



White cabinetry with glass-fronted upper cabinets and drawers below. The glass doors display dishes and mugs. The drawers have small, dark knobs. A wooden countertop runs along the base of the upper cabinets.

A large white island with a marble countertop and a sink. The island has a wooden countertop on top and a white base with drawers and cabinets. The drawers have small, dark knobs. The island is positioned in the center of the kitchen.

A window with a white frame, providing natural light to the kitchen. The view outside shows greenery.

A large, clear glass pendant light hanging over the island. The light has a simple, modern design with a metal base and a clear glass shade.

A round, black clock with white numbers and hands, mounted on the wall above the island.

A shelf with various decorative items, including a yellow vase with flowers, a red bowl, and a small figurine. The shelf is mounted on the wall above the island.

A green fern plant in a light-colored pot, placed on the island countertop.

A white sink with a chrome faucet, located on the island countertop.

A floor made of wide, light-colored wood planks with a natural wood grain pattern. The planks are laid in a staggered pattern.





OPULENCE
IMP-OPL-704

RESPONSIVE 

IMPACT[®]
A BETTER FLOOR

OPULENCE
IMP-OPL-704

5 UNIQUE
PATTERN
VARIATIONS

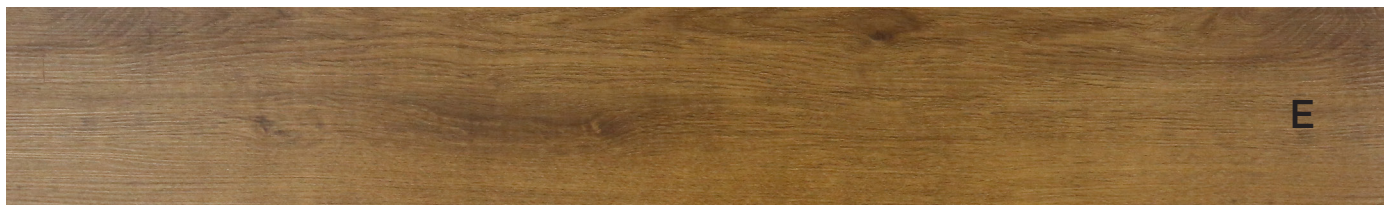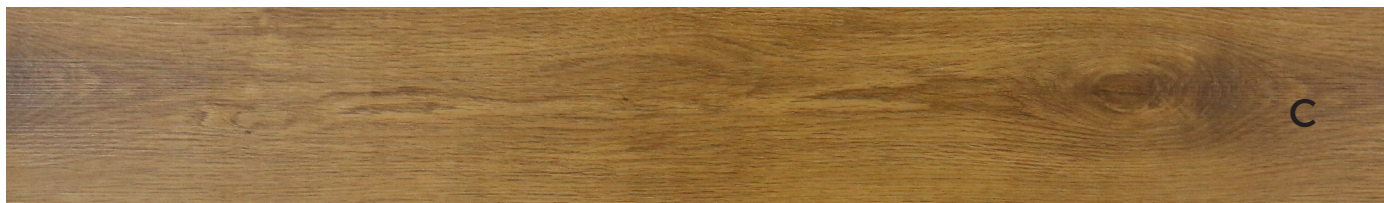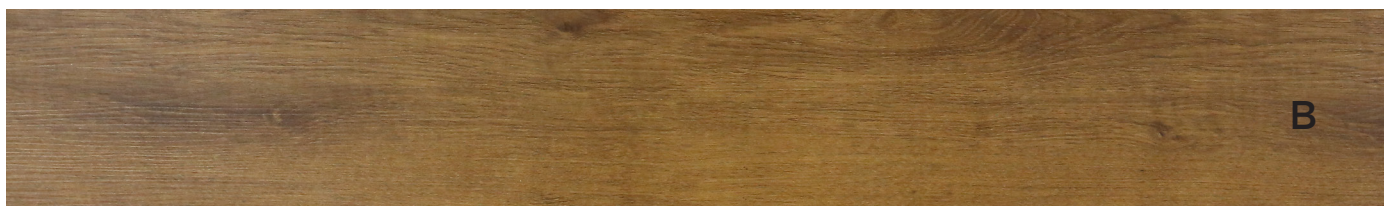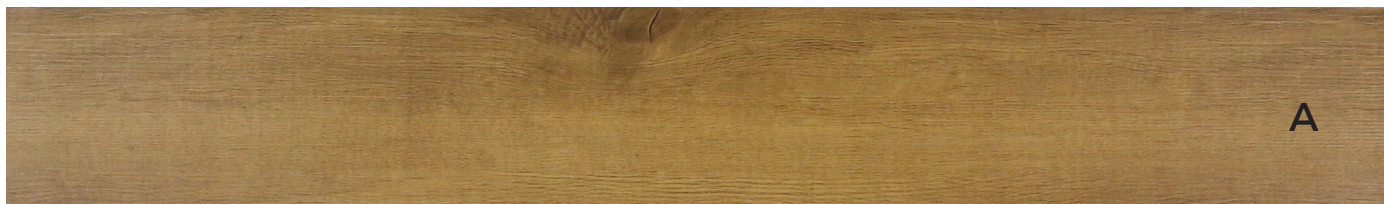





OPULENCE
IMP-OPL-705

RESPONSIVE 

IMPACT[®]
A BETTER FLOOR

OPULENCE
IMP-OPL-705

5 UNIQUE
PATTERN
VARIATIONS

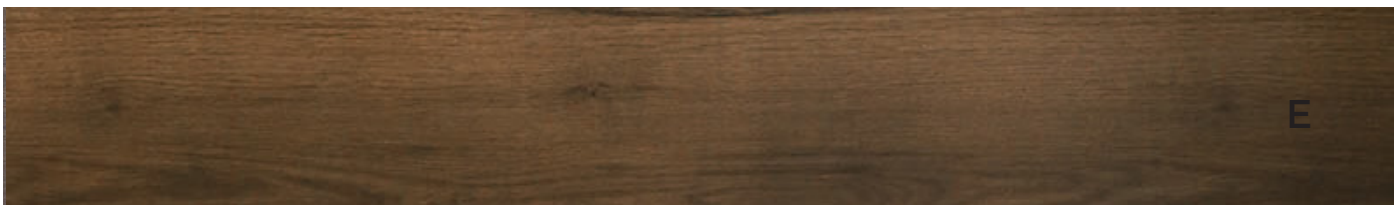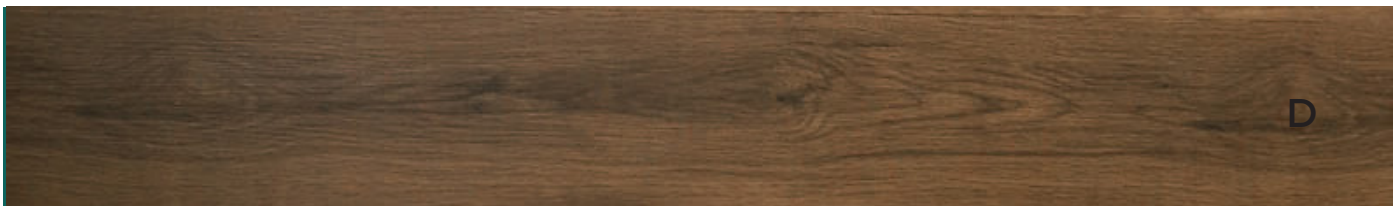



OPULENCE
IMP-OPL-706

IMPACT
A BETTER FLOOR


OPULENCE
IMP-OPL-706

RESPONSIVE 

IMPACT[®]
A BETTER FLOOR

OPULENCE
IMP-OPL-706

5 UNIQUE
PATTERN
VARIATIONS

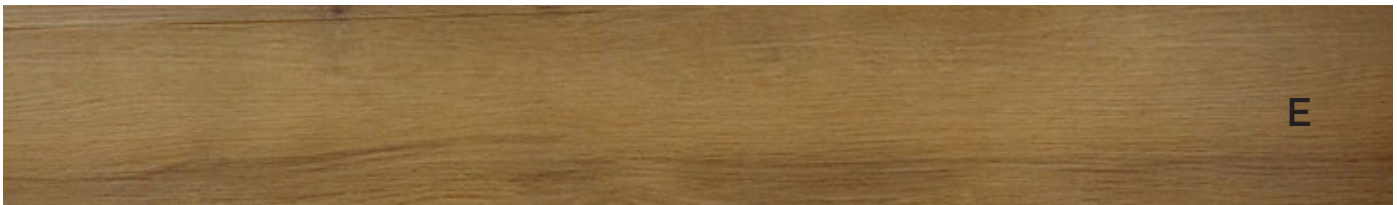



OPULENCE
IMP-OPL-707

IMPACT[®]
A BETTER FLOOR


OPULENCE
IMP-OPL-707

RESPONSIVE 

IMPACT[®]
A BETTER FLOOR

OPULENCE
IMP-OPL-707

5 UNIQUE
PATTERN
VARIATIONS

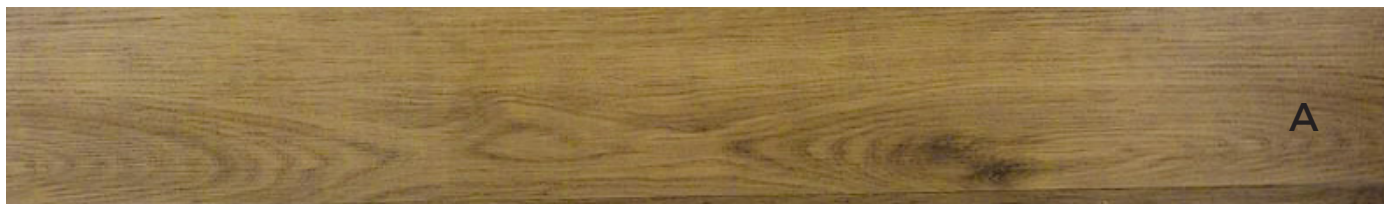



OPULENCE
IMP-OPL-708

IMPACT[®]
A BETTER FLOOR

OPULENCE
IMP-OPL-708

RESPONSIVE 

IMPACT[®]
A BETTER FLOOR

OPULENCE
IMP-OPL-708

5 UNIQUE
PATTERN
VARIATIONS





OPULENCE
IMP-OPL-709

IMPACT[®]
A BETTER FLOOR



OPULENCE
IMP-OPL-709

5 UNIQUE
PATTERN
VARIATIONS





OPULENCE
IMP-OPL-710




RESPONSIVE 

IMPACT[®]
A BETTER FLOOR

OPULENCE
IMP-OPL-710



5 UNIQUE
PATTERN
VARIATIONS

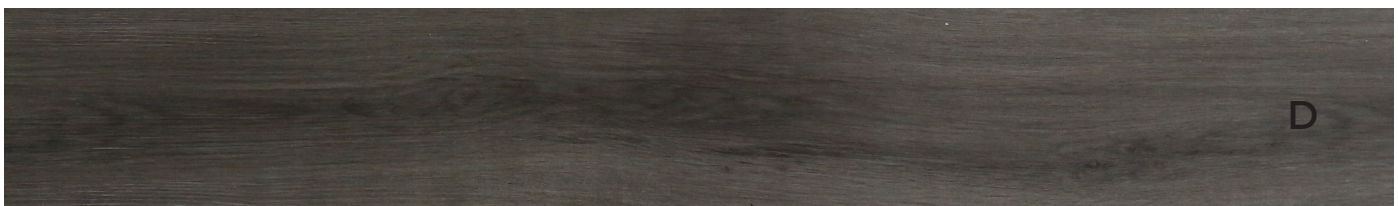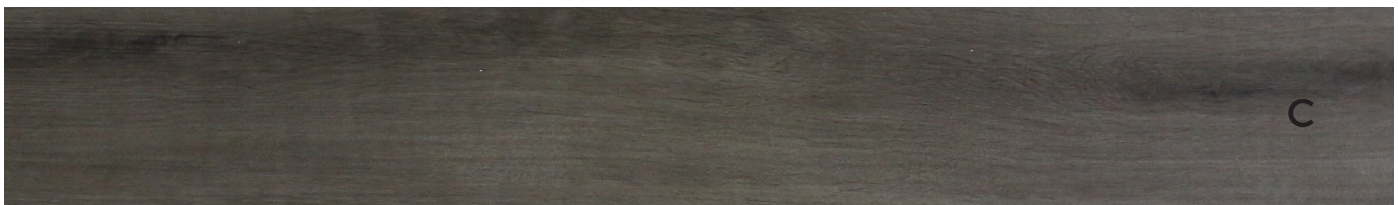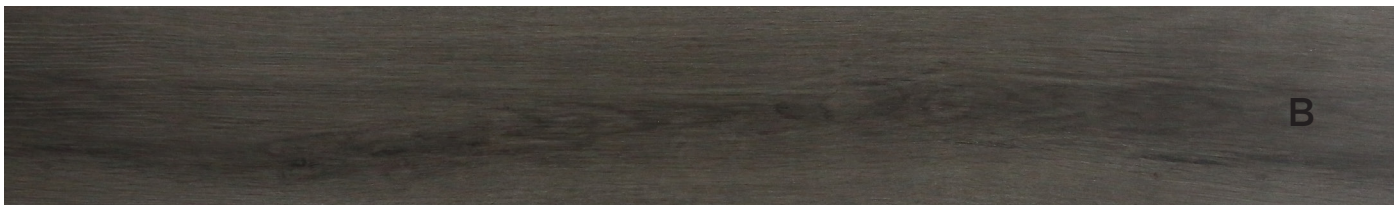

OPULENCE®

LVT FLOORING

Luxury Vinyl Tiles For Light To Heavy Commercial | PUR Polyurethane Reinforcement | Product Standard: ISO 10582

CERTIFICATION & CLASSIFICATION	STANDARD	IMPACT OPULENCE®
TYPE OF FLOOR COVERING	ISO 10582	LUXURY VINYL TILE
CE CERTIFICATION	EN 14041	Yes
CLASSIFICATION	EN ISO 10874	Commercial : 31 Heavy Commercial : 34

TECHNICAL CHARACTERISTICS	STANDARDS	IMPACT OPULENCE®
TOTAL THICKNESS	EN ISO 2436 (EN 428)	2.0 MM
WEAR LAYER THICKNESS	EN ISO 24340 (EN 429)	0.30 MM
SURFACE TREATMENT	UV TREATED	PUR
TOTAL WEIGHT	EN ISO 23997 (EN 430)	3300 g/m ²
WEAR LAYER BINDER CONTENT	ISO 10582	TYPE I
FORM OF DELIVERY	EN ISO 24342 (EN 427) Planks box	7" X 48" 20 Planks / Carton = 46.65 SF

TECHNICAL PERFORMANCES	STANDARDS	IMPACT OPULENCE®
DIMENSIONAL STABILITY	EN ISO 23999 (EN 434)	Pass
REACTION TO FIRE	EN 13501 - 1	Bfl- S1 glued over A2fl substrate (concrete)
RESIDUAL INDENTATION	EN ISO 24343-1 (EN 433)	Pass
FURNITURE LEG	EN 424	No Damage
CASTOR CHAIR	EN ISO 4918 (EN 425)	No Damage
CURL RESULTANT TO HEAT	EN ISO 23999 (434)	Pass
THERMAL RESISTANCE	EN ISO 10456	0.07 M2 K/W
LIGHT FASTNESS	EN ISO 105 - B02	>Grade 6 Pass
RESISTANCE TO CHEMICALS	EN ISO 26987 (EN423)	Good Resistance Pass
SLIP RESISTANCE	DIN51130 EN 13893	R9 Class DS
ELECTRICAL PROPERTIES	EN 1815 EN 1081	<2 kV on concrete R1 > 10 ¹⁰



ISO 9001

ISO 14001

ISO 18001



EN 14041

