

RESPONSIVE
FLOORS
EK ANOKHA EHSAAAS

OPULENCE PLUS®





PLANK SIZE: 7" x 48" x 3.0mm

OPULENCE PLUS®

LVT FLOORING

SIZE: 7" x 48"

THICKNESS: 3.0 MM

WEAR LAYER: 0.50 MM

PIECES: 14 PER BOX

COVERAGE: 32.65 SF / CARTON

INSTALLATION: DRY BACK, GLUE DOWN



OPULENCE PLUS
IMP-OPL-801

IMPACT[®]
A BETTER FLOOR

OPULENCE PLUS
IMP-OPL-801

RESPONSIVE 

IMPACT[®]
A BETTER FLOOR

OPULENCE PLUS

IMP-OPL-801




IMPACT

A BETTER FLOOR

5 UNIQUE

PATTERN

VARIATIONS

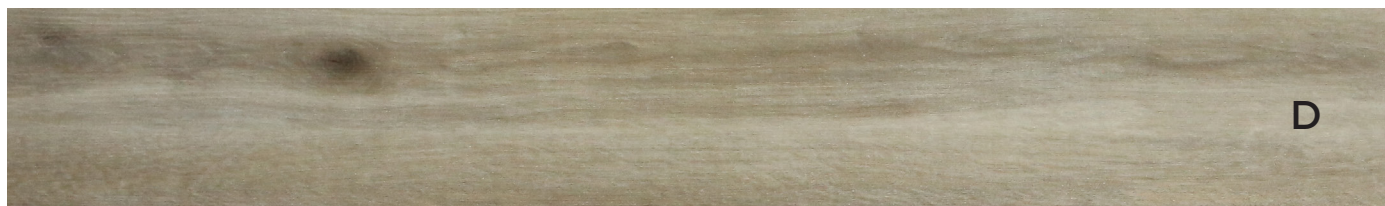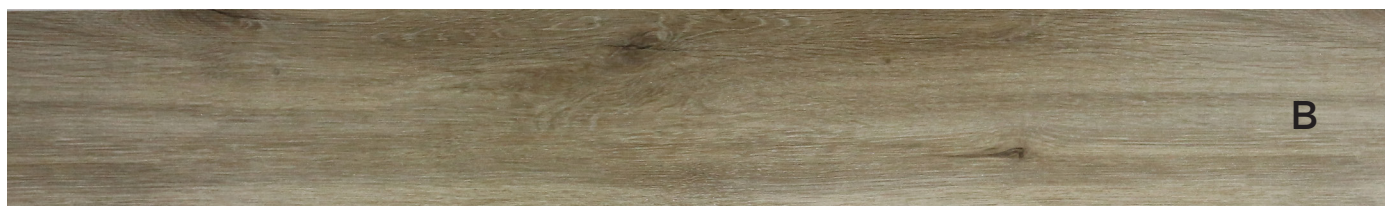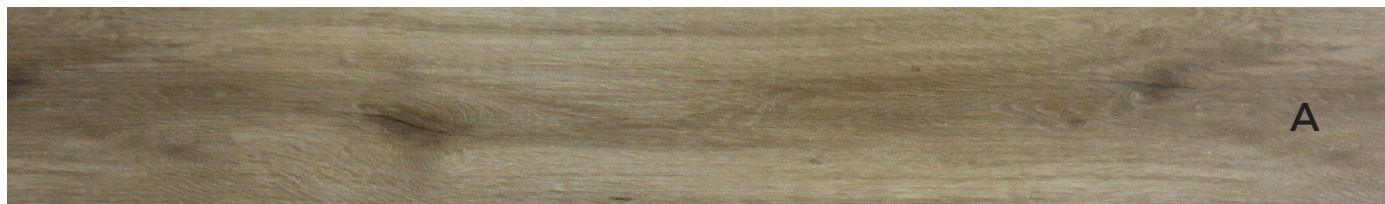



OPULENCE PLUS
IMP-OPL-802

IMPACT
A BETTER FLOOR

OPULENCE PLUS
IMP-OPL-802

RESPONSIVE 

IMPACT[®]
A BETTER FLOOR

OPULENCE PLUS



IMP-OPL-802

IMPACT[®]
A BETTER FLOOR

5 UNIQUE

PATTERN

VARIATIONS

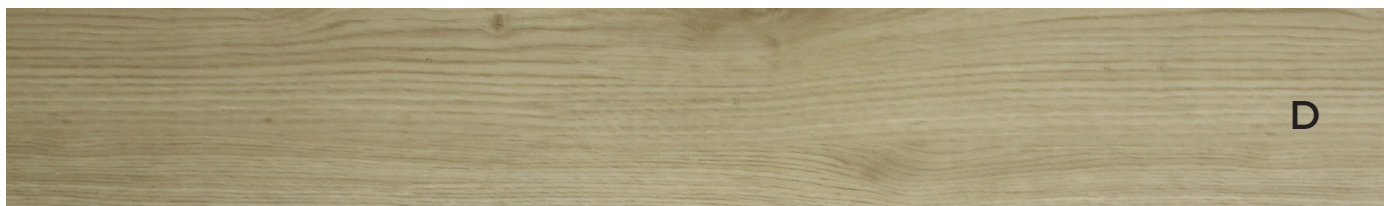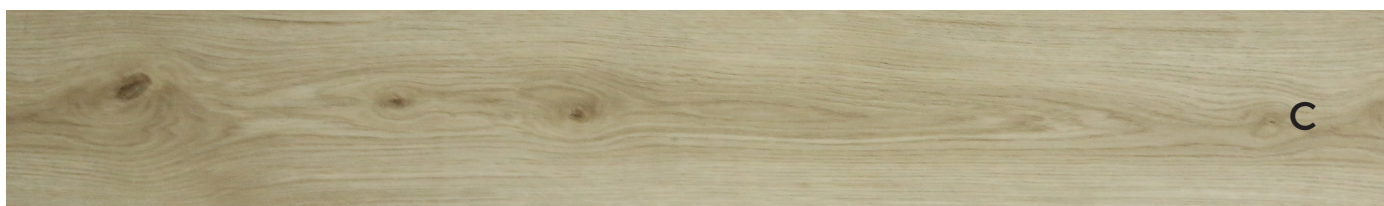



OPULENCE PLUS
IMP-OPL-803

IMPACT[®]
A BETTER FLOOR

OPULENCE PLUS
IMP-OPL-803

RESPONSIVE 

IMPACT[®]
A BETTER FLOOR

OPULENCE PLUS

IMP-OPL-803

IMPACT

A BETTER FLOOR

5 UNIQUE

PATTERN

VARIATIONS





OPULENCE PLUS
IMP-OPL-804

OPULENCE PLUS
IMP-OPL-804

RESPONSIVE 

IMPACT[®]
A BETTER FLOOR

OPULENCE PLUS

IMP-OPL-804

IMPACT

A BETTER FLOOR

5 UNIQUE

PATTERN

VARIATIONS





OPULENCE PLUS
IMP-OPL-805

OPULENCE PLUS
IMP-OPL-805

RESPONSIVE 

IMPACT[®]
A BETTER FLOOR

OPULENCE PLUS

IMP-OPL-805


IMPACT

A BETTER FLOOR

5 UNIQUE

PATTERN

VARIATIONS

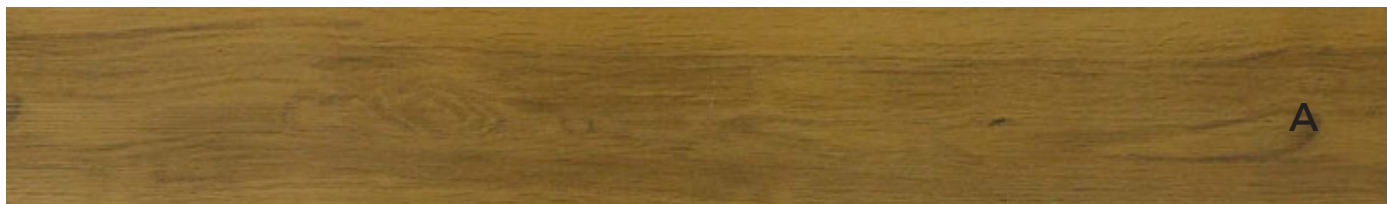



OPULENCE PLUS
IMP-OPL-806

IMPACT
A BETTER FLOOR

OPULENCE PLUS
IMP-OPL-806

RESPONSIVE 

IMPACT[®]
A BETTER FLOOR

OPULENCE PLUS

IMP-OPL-806





IMPACT

A BETTER FLOOR

5 UNIQUE

PATTERN

VARIATIONS

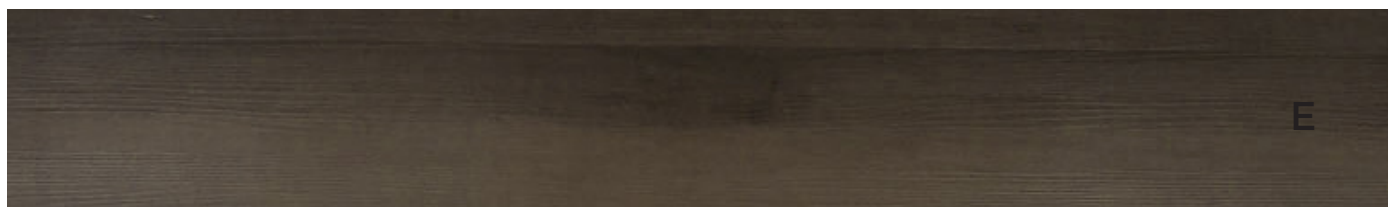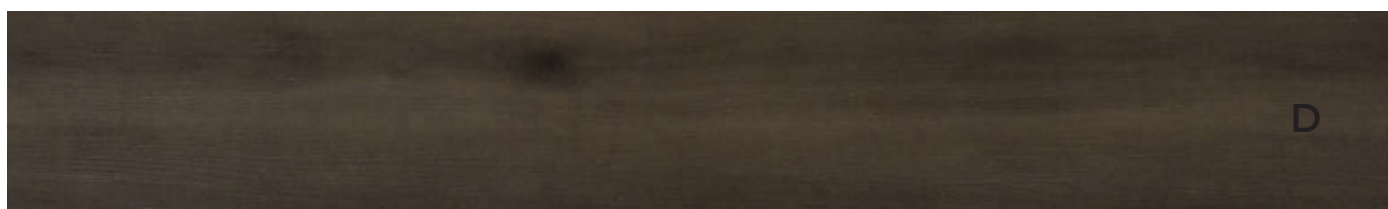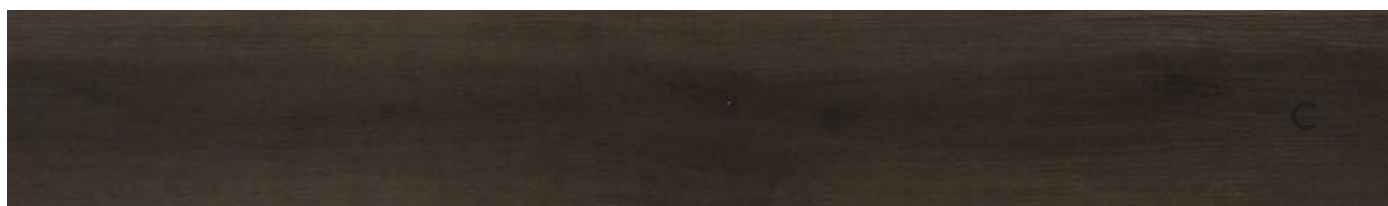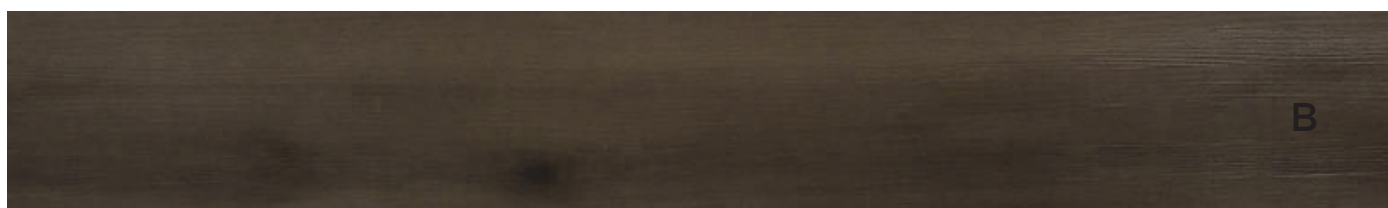



OPULENCE PLUS
IMP-OPL-807

IMPACT[®]
A BETTER FLOOR

OPULENCE PLUS
IMP-OPL-807

RESPONSIVE 

IMPACT[®]
A BETTER FLOOR

OPULENCE PLUS

IMP-OPL-807






IMPACT

A BETTER FLOOR

5 UNIQUE

PATTERN

VARIATIONS

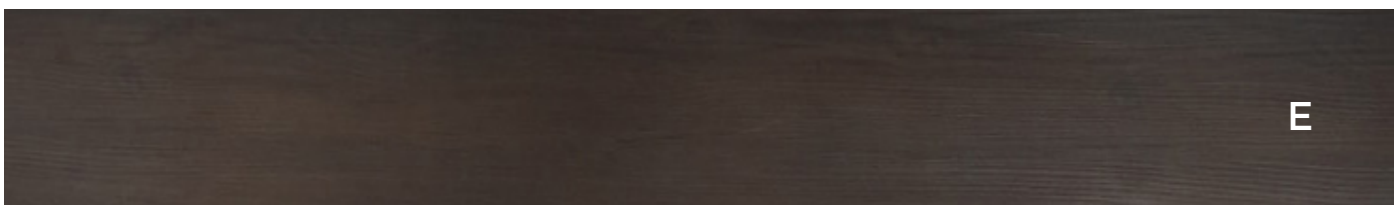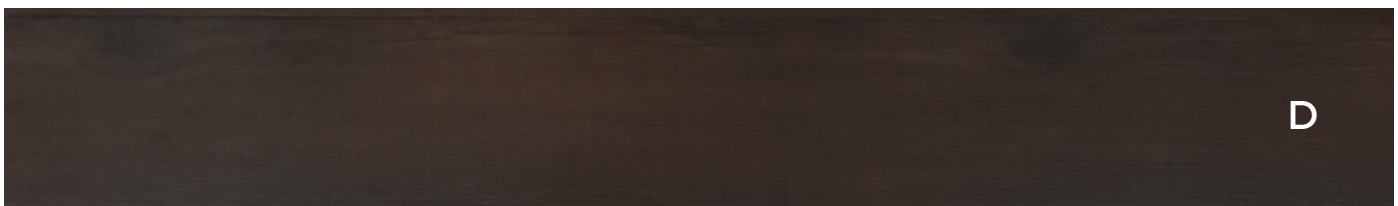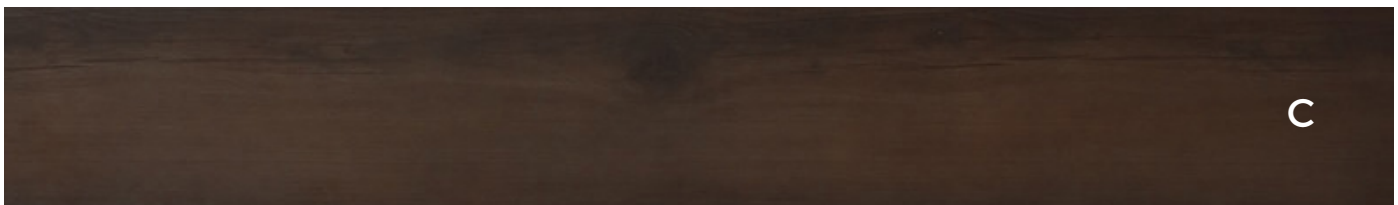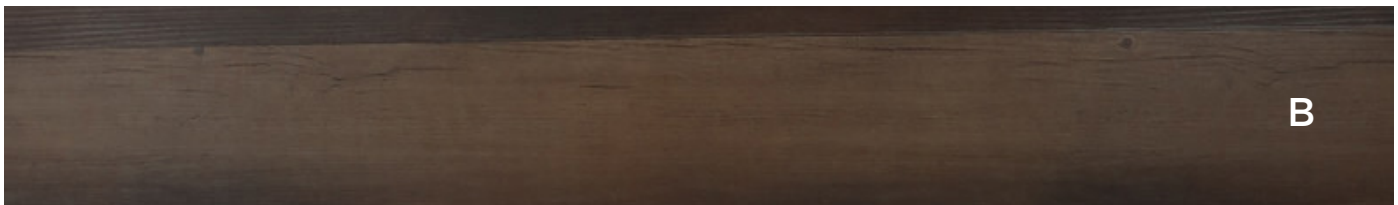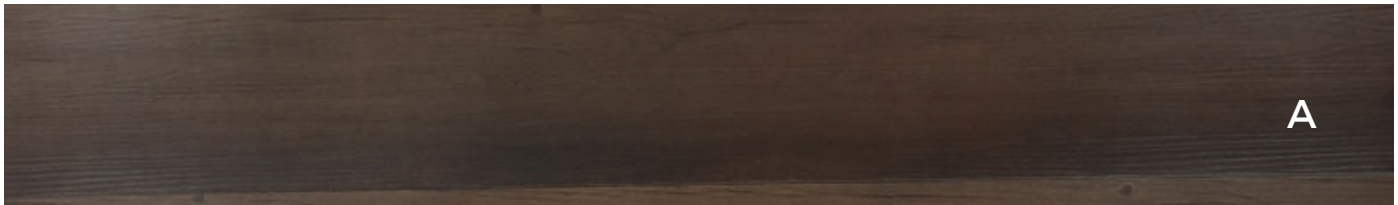



OPULENCE PLUS
IMP-OPL-808

IMPACT[®]
A BETTER FLOOR

OPULENCE PLUS
IMP-OPL-808

RESPONSIVE 

IMPACT[®]
A BETTER FLOOR

OPULENCE PLUS

IMP-OPL-808

IMPACT

A BETTER FLOOR

5 UNIQUE

PATTERN

VARIATIONS





OPULENCE PLUS
IMP-OPL-809

IMPACT[®]
A BETTER FLOOR

OPULENCE PLUS
IMP-OPL-809

RESPONSIVE 

IMPACT[®]
A BETTER FLOOR

OPULENCE PLUS

IMP-OPL-809

IMPACT

A BETTER FLOOR

5 UNIQUE

PATTERN

VARIATIONS



A



B



C



D



E



OPULENCE PLUS
IMP-OPL-810

IMPACT[®]
A BETTER FLOOR

OPULENCE PLUS
IMP-OPL-810

RESPONSIVE 

IMPACT[®]
A BETTER FLOOR

OPULENCE PLUS

IMP-OPL-810






IMPACT

A BETTER FLOOR

5 UNIQUE

PATTERN

VARIATIONS

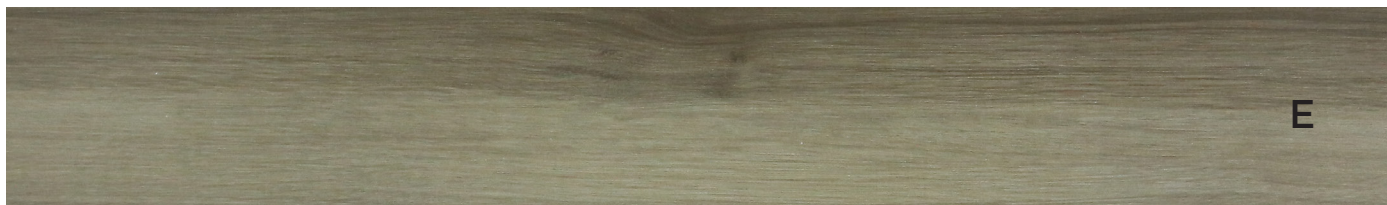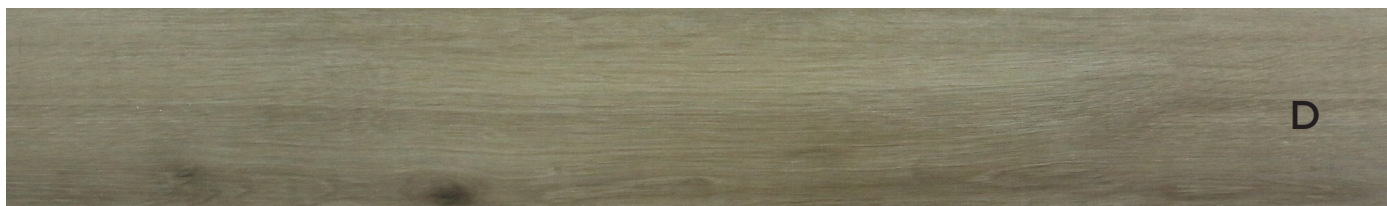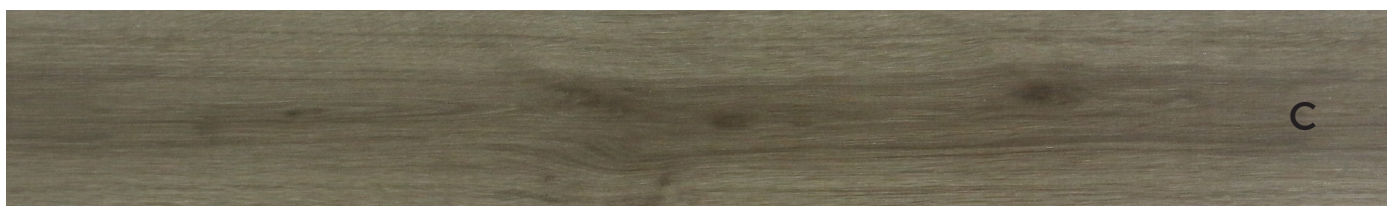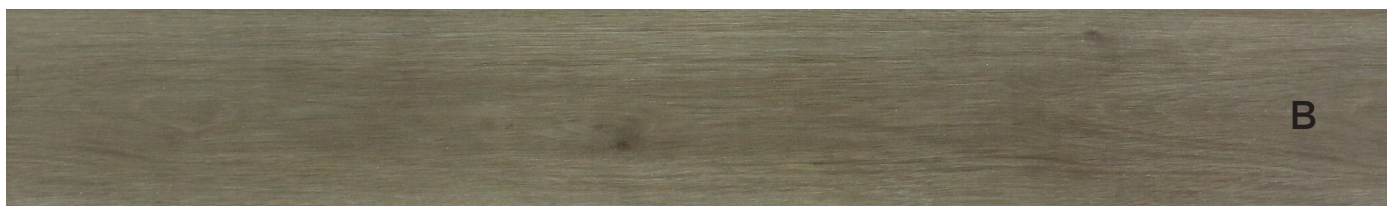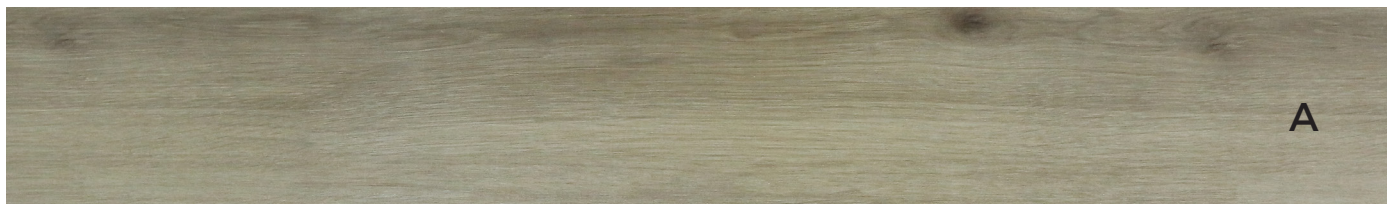

OPULENCE PLUS®

LVT FLOORING

Luxury Vinyl Tiles For Light To Heavy Commercial | PUR Polyurethane Reinforcement | Product Standard: ISO 10582

CERTIFICATION & CLASSIFICATION	STANDARD	IMPACT OPULENCE PLUS®
TYPE OF FLOOR COVERING	ISO 10582	LUXURY VINYL TILE
CE CERTIFICATION	EN 14041	Yes
CLASSIFICATION	EN ISO 10874	Commercial : 31 Heavy Commercial : 34

TECHNICAL CHARACTERISTICS	STANDARDS	IMPACT OPULENCE PLUS®
TOTAL THICKNESS	EN ISO 2436 (EN 428)	3.0 MM
WEAR LAYER THICKNESS	EN ISO 24340 (EN 429)	0.50 MM
SURFACE TREATMENT	UV TREATED	PUR
TOTAL WEIGHT	EN ISO 23997 (EN 430)	3300 g/m ²
WEAR LAYER BINDER CONTENT	ISO 10582	TYPE I
FORM OF DELIVERY	EN ISO 24342 (EN 427) Planks box	7' X 48" 14 Planks / Carton = 32.65 SF

TECHNICAL PERFORMANCES	STANDARDS	IMPACT OPULENCE PLUS®
DIMENSIONAL STABILITY	EN ISO 23999 (EN 434)	Pass
REACTION TO FIRE	EN 13501 - 1	Bfl- S1 glued over A2fl substrate (concrete)
RESIDUAL INDENTATION	EN ISO 24343-1 (EN 433)	Pass
FURNITURE LEG	EN 424	No Damage
CASTOR CHAIR	EN ISO 4918 (EN 425)	No Damage
CURL RESULTANT TO HEAT	EN ISO 23999 (434)	Pass
THERMAL RESISTANCE	EN ISO 10456	0.07 M2 K/W
LIGHT FASTNESS	EN ISO 105 - B02	>Grade 6 Pass
RESISTANCE TO CHEMICALS	EN ISO 26987 (EN423)	Good Resistance Pass
SLIP RESISTANCE	DIN51130 EN 13893	R9 Class DS
ELECTRICAL PROPERTIES	EN 1815 EN 1081	<2 kV on concrete R1 > 10 ¹⁰



ISO 9001
ISO 14001
ISO 18001

